


## GPF 2 Pipeless Filter

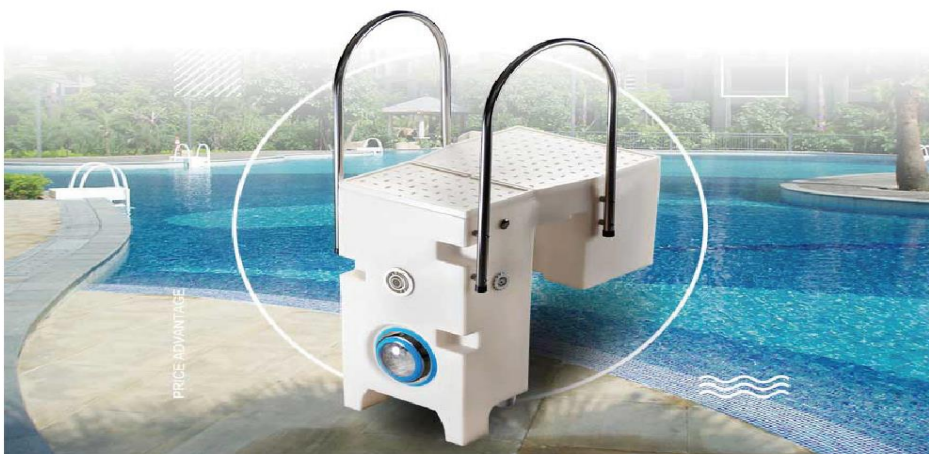


### GPF2 Pipeless Filter

It is an acrylic filter. Integrated filter installation reduces construction costs. The 8pcs filter bag is a large flow.

#### PRODUCT DETAIL

The enclosure of wall-mounted filter is made of high quality Acrylic, so the filter is anti-acid anti-fading, and easy to clean. Integrated filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. The filter is made according to Countries codes and standards

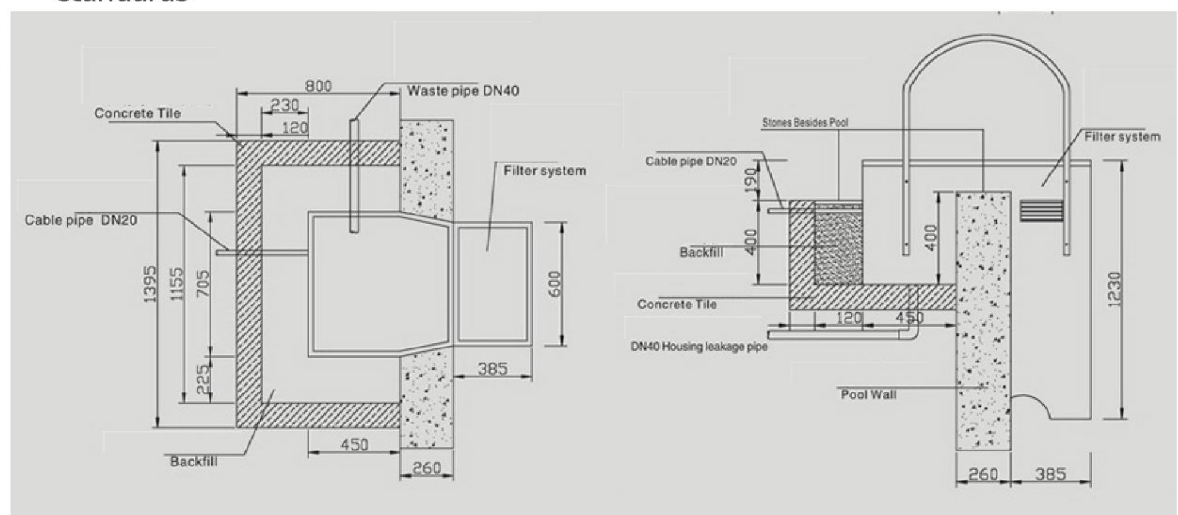

TECHNICAL CHARACTERISTICS	
Dimensions	1095x 705x 1230mm
Flow rate	25m <sup>3</sup> /h
Voltage	380V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Polyethylene
Installation	Wall mounting
EQUIPMENT	
Filtration Pump	1x2HP
Filtration basket with bag	1pc
Chlorine feeder	1pc
Light	1x LED or 100W
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Heater (optional)	1pc
Ozone(optional)	1pc
SYSTEM	
Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circle system	1pc
Lighting system	1pc