

Top Mount Sand Filter GFT3


Top Mounted Sand filter

GFT3

GFT3 sand filter made of fiberglass and resin of high quality has good chemical resistance and the performance of anti-UV. Its surface is not easy to crack and be broken by the impact because sand filter itself has a certain degree of flexibility. The water distribution designed uniquely can stabilize current uniformly and to improve drainage system. It is easy to install, repair and convenient for maintenance. After filtration, turbidity of water is less than 2 degrees. It brings cleanliness and sanitation for your swimming pool and it is preferred filtration equipment for swimming pool, spa pool, waterscape and water park

Feature:

- Filter body covered with ultraviolet -proof layers of polyurethane
- Ergonomic six-way valve in seating design
- With excellent filtering capabilities
- Anti-chemical corrosion
- It equips with gauge
- This Model with the function of flushing, you can run it only by simple
- Operation when in need. this additional costs at maintenance could be saved.
- The equipment of sand valves at the bottom row provide convenience for removal or replacement of sand in filter

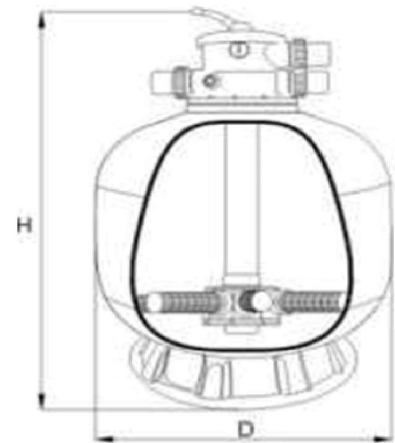

Model	Size (D)	inlet/outlet (inch)	flow rate(m ³ /h)	Filtration area(m ²)	(kg)	height H (mm)	Package Size(without valve)	Weight (kg)(without valve)
GFT3-400	400mm	1.5'	6.3	0.13	35	435	410*410*490	11.5
GFT3-450	450mm	1.5'	7	0.14	50	725	440*440*540	12.5
GFT3-500	500mm	1.5'	10	0.2	80	805	510*510*670	14
GFT3-600	600mm	1.5'	15	0.3	160	875	630*630*670	19
GFT3-700	700mm	1.5'	18.5	0.37	220	975	710*710*670	22.5
GFT3-800	800mm	2'	25	0.5	370	1145	830*830*930	39.5
GFT3-900	900mm	2'	30	0.64	447	1255	900*900*990	40
GFT3-1000	1000mm	2'	35	0.79	700	1350	1030*1030*1200	57
GFT3-1100	1100mm	2'	44	0.98	960	1490	1135*1135*1260	57
GFT3-1200	1200mm	2'	50	1.13	1200	1555	1230*1230*1380	68
GFT3-1400	1400mm	2'	68	1.53	1700	1775	1440*1440*1550	96