




GFT Series Filter

Top Mounted Sand filter

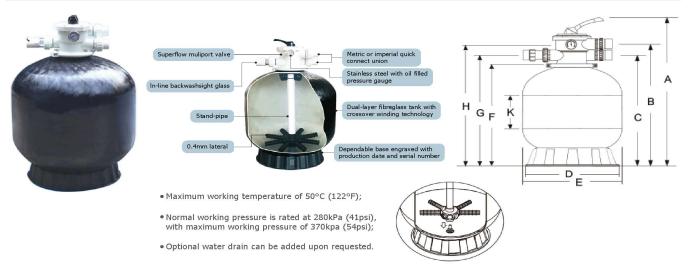

GPOOL Classic Fiberglass Media Filter (Top Mounted) Specifications

			_							-				
MODEL	Tank Dia.	MPV size			Filter Area	Bed Depth	Silica Sand	Max Flow Rate		Designed Velocity	Back Wash Flow Rate		Max. Working Pressure	Gross Weight
	mm	inch	mm(AUS)	mm(BU)	m2	mm	kg	ipm	m3/h	m3/hr/m2	ipm	m3/h	kpa	kg
GFT-410	410	1.5	40	50	0.13	230	30	105	6	48	110	7	370	16
GFT-454	454	1.5	40	50	0.16	280	40	133	8	48	140	8	370	16.5
GFT-534	534	1.5	40	50	0.23	240	85	192	12	48	202	12	370	21.1
GFT-635	635	1.5	40	50	0.33	336	155	270	16	48	284	17	370	24.3
GFT-700	700	1.5	50	63	0.38	348	210	320	19	48	336	20	370	33
GFT-820	820	2	50	63	0.5	384	250	420	25	48	441	26	370	41.5
GFT-920	920	2	50	63	0.64	384	350	500	30	48	525	31	370	52.3
GFT-1016	1016	2	50	63	0.79	432	600	550	33	48	578	35	370	95
GFT-1092	1092	2	50	63	0.98	432	900	630	38	48	662	40	370	115
GFT-1210	1210	2	50	63	1.13	504	1150	700	42	48	735	44	370	124
GFT-1404	1404	2	50	63	1.54	708	1800	950	57	48	998	60	370	182.5
GFT-700B	700	1.5	40	50	0.38	248	210	333	20	48	350	21	370	33

Dimension

Model	А	В	С	D	E	F	G	Н	К	Packaging sizes (Excluded Mpv)		
											Width	Height
mm												
GFT-410	770	641	585	390	410	525	585	641	230	413	413	528
GFT-454	810	674	614	390	454	558	614	674	250	457	457	561
GFT-534	867	731	671	497	534	615	671	731	240	537	537	618
GFT-635	967	831	771	497	635	717	783	863	280	638	638	718
GFT-700	1027	891	831	497	700	780	846	926	290	703	703	778
GFT-820	1180	1026	946	714	820	880	946	1026	320	823	823	883
GFT-920	1285	1131	1051	714	920	985	1051	1131	320	923	923	988
GFT-1016	1406	1252	1172	720	1016	1106	1172	1252	360	1019	1019	1109
GFT-1092	1480	1350	1270		1092	1210	1290	1340	360	1095	1095	1213
GFT-1210	1500	1450	1370		1210	1310	1370	1400	420	1213	1213	1313
GFT-1404	1615	1565	1485		1404	1425	1485	1575	590	1407	1407	1428
GFT-700B	1080	926	546	497	700	780	846	926	190	703	703	783